

Distributed by:



www.texim-europe.com



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



Winstar Display Co., LTD

華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

SPECIFICATION

CUSTOMER : _____

MODEL NO. : WLOF00043000WGAAASA00

<p style="text-align: center;">APPROVED BY:</p> <p style="text-align: center;">(FOR CUSTOMER USE ONLY)</p>	
---------------------------------------------------------------------------------------------------------------------	--

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY
	Ginger Xu	Hedy Lai	Jason Chan

VERSION	DATE	REVISED PAGE NO.	SUMMARY
J	2024/11/13	p6	Revised the content of feature


TFT Display Inspection Specification: <https://www.winstar.com.tw/technology/download.html>

Precaution in use of TFT module: <https://www.winstar.com.tw/technology/download/declaration.html>

RECORDS OF REVISION			DOC. FIRST ISSUE
VERSION	DATE	REVISED PAGE NO.	SUMMARY
0	2021/05/05		First issue
A	2021/07/27	8 15 6	Modify the CTP IC info on Drawing. Modify the COB-ID name to Node id. Modify the Summary content
B	2021/12/21	10 17	Modify the new part number of LCM. Add new object
C	2022/01/18	8	Modify CAD Drawing
D	2022/02/14	13	Modify static electricity test data Modify specification data
E	2022/04/15	9 14	Add PCBA Part number Add description of default selection
F	2023/09/11	9	Add note in 6.Electrical Characteristics
G	2023/09/18	6 7 9 13	Revise Operating voltage & Pixel pitch, Electrical Characteristics, and Check samples by meter VIN, Isystem
H	2024/02/07	6 11	Revise 250KB to 250Kbps and CN1 Pin 4&8 to Input
I	2024/06/27	10	Modify block diagram information
J	2024/11/13	p6	Revised the content of feature

Contents

1. Smart Display Classification Information
2. Summary
3. Product information
4. Contour Drawing
5. Absolute Maximum Ratings
6. Electrical Characteristics
7. BOM
8. Block diagram
9. Interface
10. Reliability
11. Product inspection check list

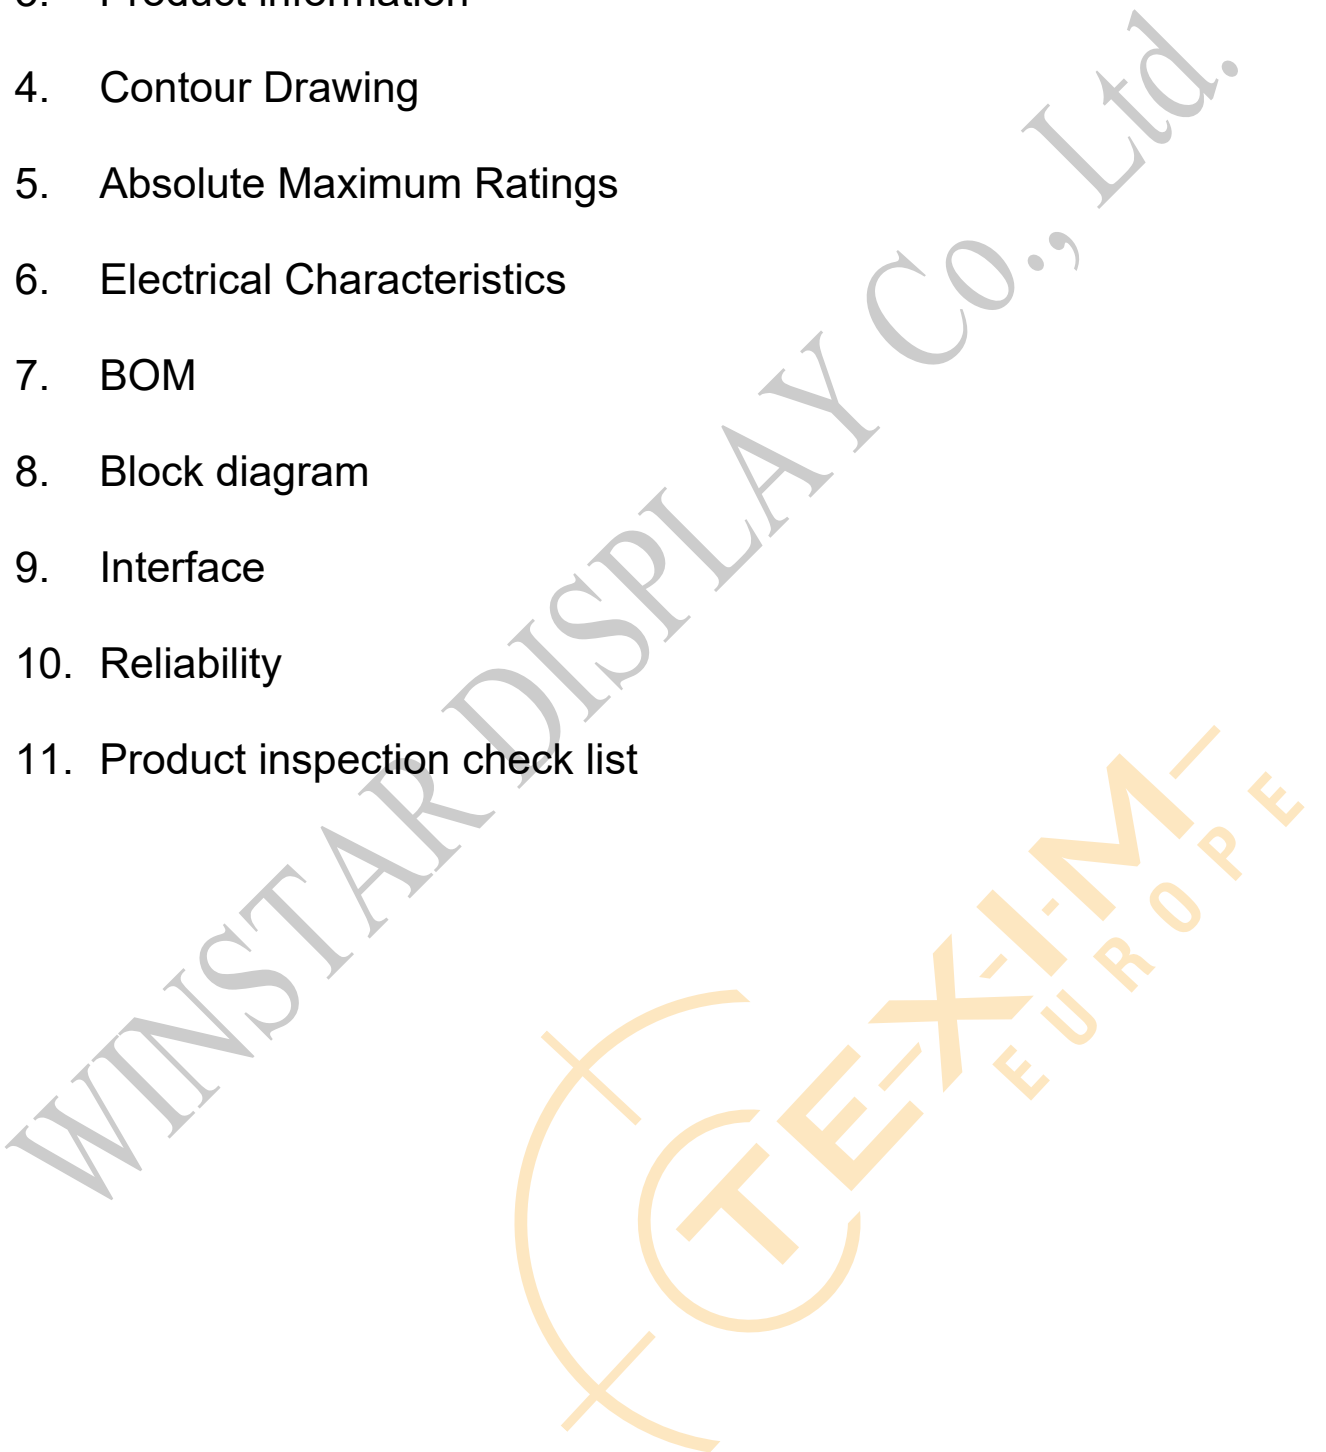

1. Smart Display Classification Information

W	L	OF	000430	00W	G	A	AA	S	A	00
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪

①	W: WINSTAR products									
②	Type: L:Standard K:Customization									
③	Display Type:	Standard:	0H: Character STN 0X: Graphic STN (TAB/COF) 0F: TFT EH: Character OLED EX: OLED (TAB/COF)	0G: Graphic STN 0P: Graphic STN (COG) EG: Graphic OLED EP: OLED (COG)						
		Customization:	DH: Character DN: Graphic ED: OLED	DG: Graphic STN OJ: TFT						
④	Display size: (diagonal) / Display format: (resolution)	Character STN:	e.g., 8x1: 000801 16x2: 001602 24x4: 002404							
		Graphic STN:	e.g., 128x64: 012864 320x240: 320240							
		TFT Size (inch):	000096-0.96" / 000350-3.5" / 000430-4.3" / 000570-5.7" 000700-7.0" / 000800-8.0" / 001020-10.2" / 001210-12.1" (The last two digits are two digits after the decimal point)							
	OLED:	e.g., 128x64: 012864 Customization: 0001XX								
⑤	Serial No:	0A1 ~ 0ZZ	Customization STN: 000							

⑥	Touch Panel Type:	N: Without TP T: RTP G: CTP								
⑦	Model Interface:	A: CAN	H: HDMI	X: Combined						
		B: Bluetooth	R: Memory Specified	Y: Proprietary interface						
		C: Controller Specified	N: Ethernet							
		D: RS485	J: Analog I/O							
		E: RS232	K: USB							
		F: USART	L: WIFI							
		G: Logic I/O	M: Zigbee							
⑧	Interface Serial No.:	AA ~ ZZ								
⑨	Control Category:	S: Smart Display E: Entry N: Non-specified								
⑩	Special Code:	A ~ Z								
⑪	Model code:	00 ~ ZZ								

2. Summary

4.3 Inch Smart Display Feature

1. DC 5-24V working voltage.
2. Self-testing after booting function.
3. CAN bus communication interface.
4. Supports CANopen protocol, default baud rate at 250Kbps.
5. Built in 16MB flash memory, store the fonts and pictures.
6. Support capacitive touch panel (CTP).
7. Embedded buzzer controlled by Master Device.
8. Demo set HOST can be used on multiple platforms, such as Computer (with USB to CAN Dongle), MCU, Raspberry Pi (with PiCAN2).



3. Product information


General information

Item	Standard Value	Unit
Operating voltage	5-24	Vdc
Communication Interface	CAN bus	-
MCU	STM32F750	N/A
Flash Memory	16	MB
SDRAM Frequency	108	MHz
LCD display size	4.3	inch
Dot Matrix	480 × RGB × 272(TFT)	dots
Module dimension	119.3(W) × 67.2(H) × 12.45(D)	mm
Active area	95.04(W) × 53.856(H)	mm
Pixel pitch	0.198(H) × 0.198(V)	mm
LCD type	TFT, Normally Black, Transmissive	
View Direction	80/80/80/80	
Aspect Ratio	16:9	
With /Without TP	With CTP	
Surface	Glare	

4. Contour Drawing

WINSTAR DISPLAY Co., Ltd.



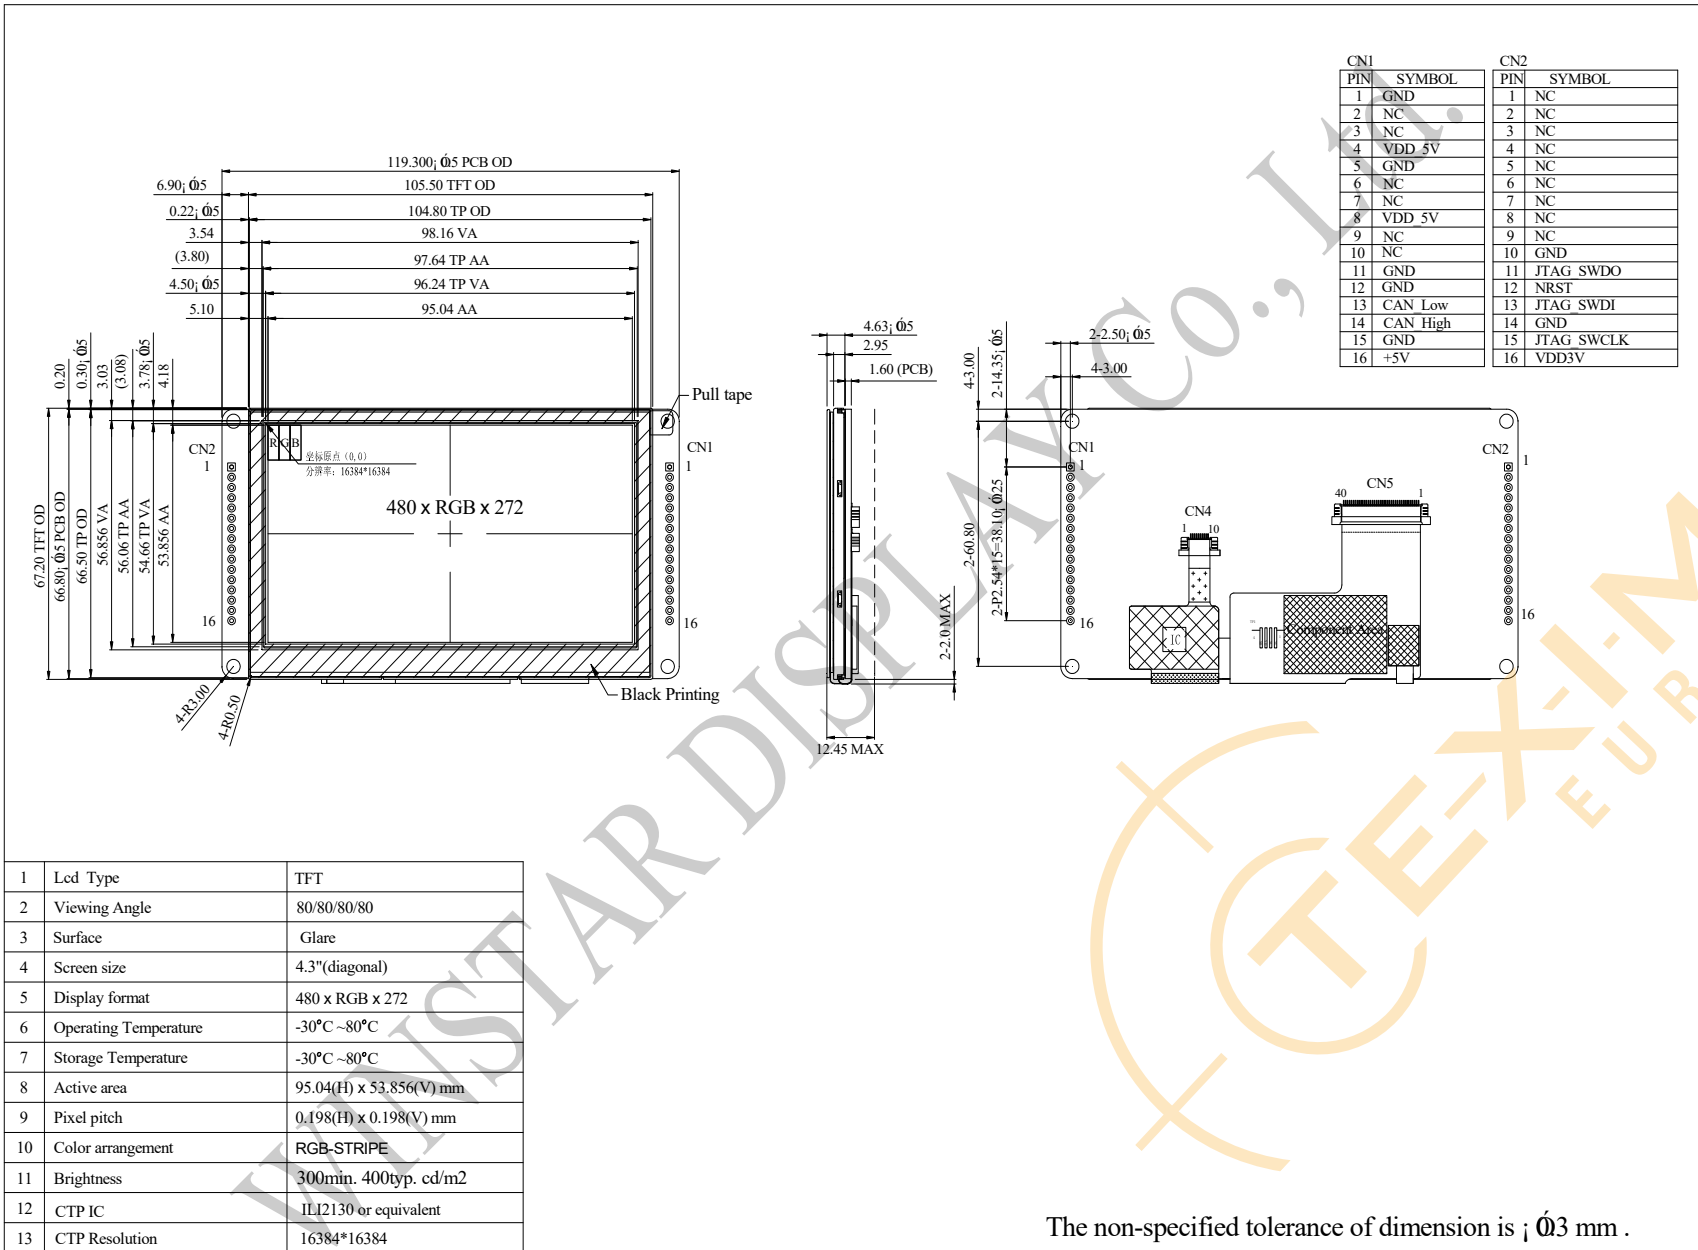

1	Led Type	TFT
2	Viewing Angle	80/80/80/80
3	Surface	Glare
4	Screen size	4.3"(diagonal)
5	Display format	480 x RGB x 272
6	Operating Temperature	-30°C ~80°C
7	Storage Temperature	-30°C ~80°C
8	Active area	95.04(H) x 53.856(V) mm
9	Pixel pitch	0.198(H) x 0.198(V) mm
10	Color arrangement	RGB-STRIFE
11	Brightness	300min. 400typ. cd/m2
12	CTP IC	IL12130 or equivalent
13	CTP Resolution	16384*16384

The non-specified tolerance of dimension is ; $\phi 3$ mm .

5. Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-30	—	+80	°C
Storage Temperature	TST	-30	—	+80	°C

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above
1. Temp. $\leq 60^{\circ}\text{C}$, 90% RH MAX. Temp. $> 60^{\circ}\text{C}$, Absolute humidity shall be less than 90% RH at 60°C

6. Electrical Characteristics


Item	Symbol	Min	Typ	Max	Unit	Remark
Supply Voltage	VCC	5	12	24	V	
Supply Current	ICC		170		mA	

Note: A 10uF/50V~100uF/50V electrolytic capacitor must be added to the power supply if the device supply voltage exceeds 12V.

7. BOM

Item	Description	Remark
LCM	WF43WTWAEDNGA#	
PCBA	SV10004R300WA00N0108	

8. Block diagram

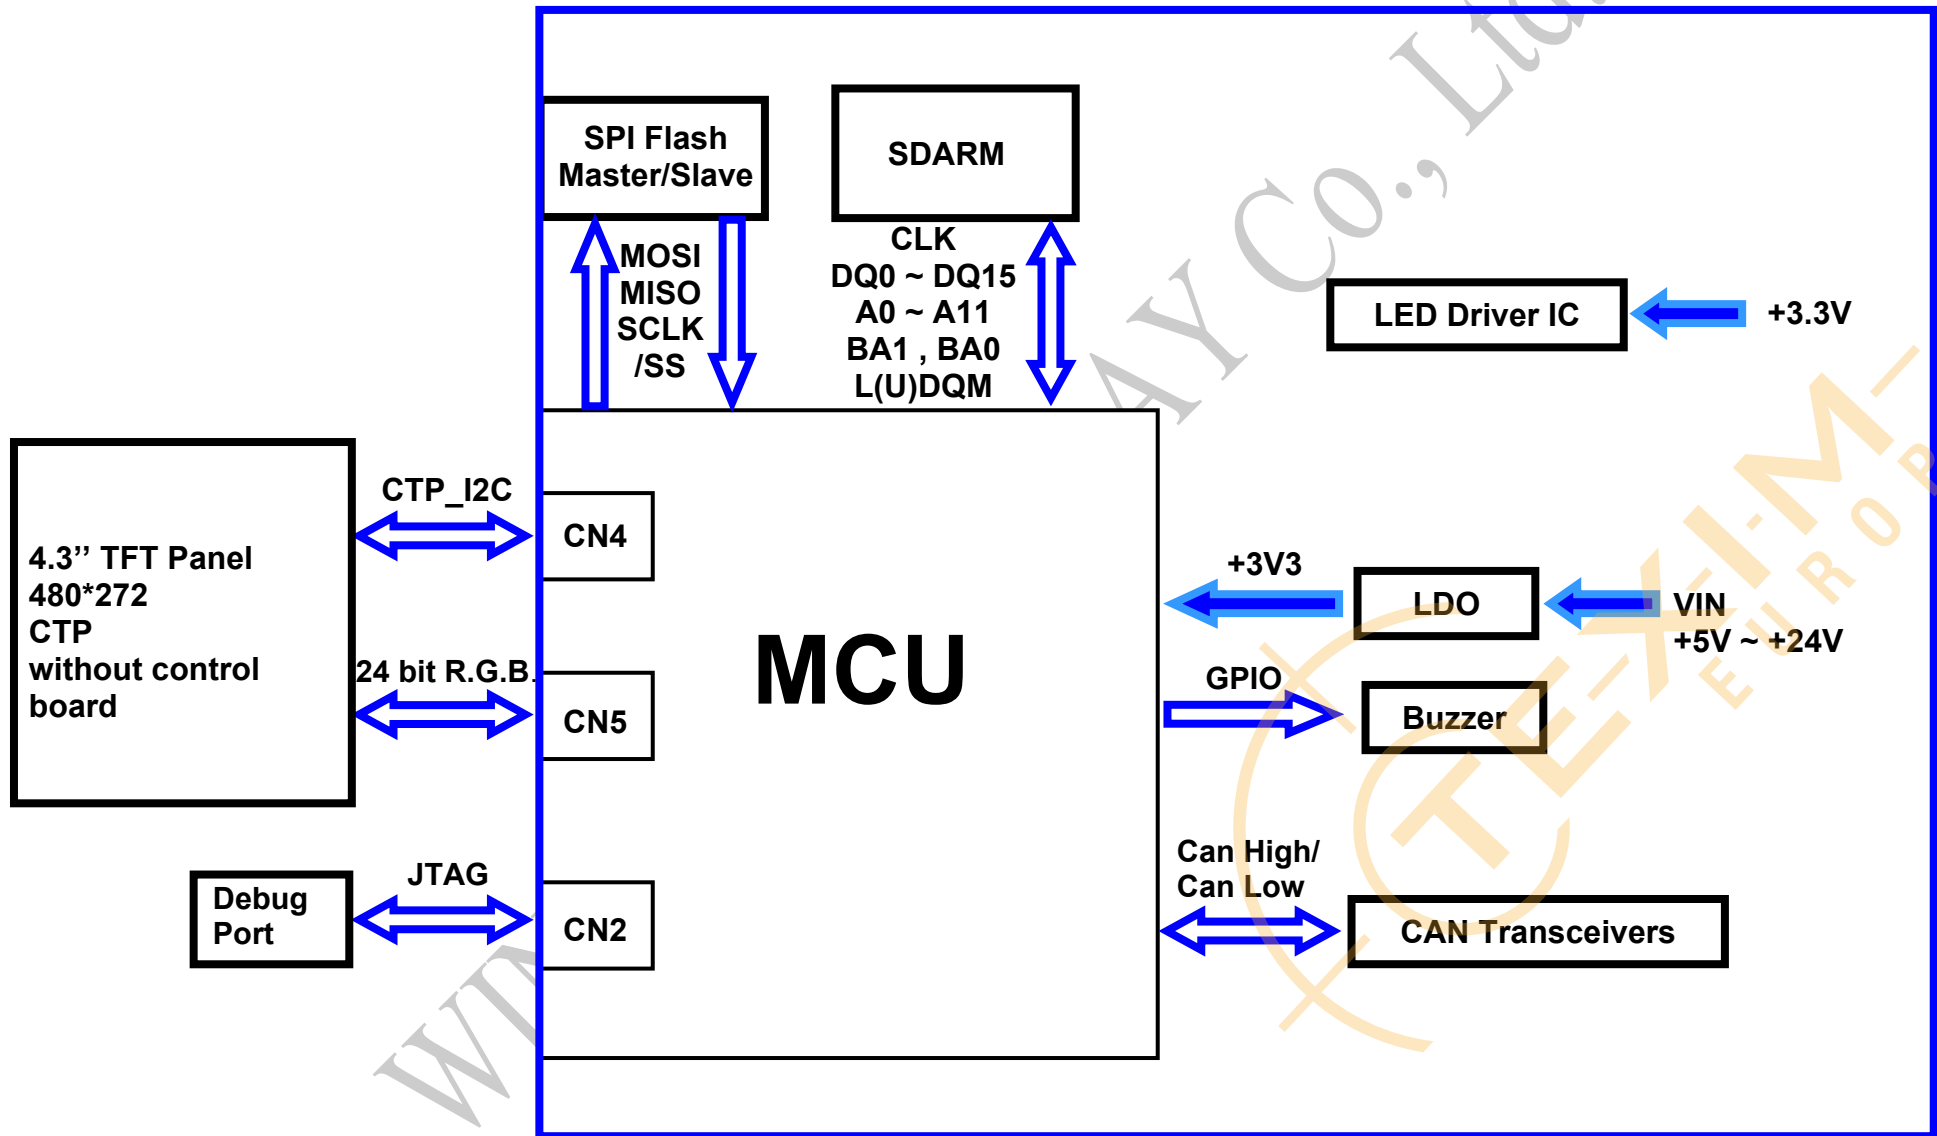

9. Interface

CN1 definition:


Pin	Symbol	Function	Remark
1	GND	GND	Output
2-3	NC	--	--
4	+5V	VIN	Input
5	GND	GND	Output
6-7	NC	--	--
8	+5V	VIN	Input
9-10	NC	--	--
11-12	GND	GND	Output
13	CAN_Low	CAN bus D-	I/O
14	CAN_High	CAN bus D+	I/O
15	GND	Power GND	Input
16	+5V	Power +5V ~ +24V	Input

CN2 definition:

Pin	Symbol	Function	Remark
1-9	NC	--	--
10	GND	GND	Output
11	JTAG_SWDO	Data pin for JTAG interface	I/O
12	NRST	Reset pin for JTAG interface	Input
13	JTAG_SWDI	Data pin for JTAG interface	I/O
14	GND	GND for JTAG interface	Output
15	JTAG_SWCLK	CLK pin for JTAG interface	Input
16	VDD3V	3.3V power for JTAG interface	Output

10. Reliability

Content of Reliability Test (Wide temperature, -30°C~80°C)

Environmental Test			
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 200hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	80°C 200hrs	—
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-30°C 200hrs	1
High Temperature/Humidity Operation	The module should be allowed to stand at 60°C,90%RH max	60°C,90%RH 96hrs	1,2
Thermal shock resistance	<p>The sample should be allowed stand the following 10 cycles of operation</p> <p style="text-align: center;"> -30°C 25°C 80°C  30min 5min 30min 1 cycle </p>	-30°C/80°C 10 cycles	—
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=±2KV~±6KV(con tact),±2KV~±8KV (air), RS=330Ω CS=150pF 10 times	—

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

11. Product inspection check list

Check samples by meter V_{IN} , I_{system}

Item	No 1	No 2	No 3	Note
V_{IN} (V)	12	12	12	
I_{system} (mA)	169	171	170	

Check sample Reliability Test

Item	Result	Note
Thermal shock		-30°C/80°C 10 cycles
High Temperature Operation	PASS_20210217	80°C 200hrs
Low Temperature Operation	PASS_20210315	-30°C 200hrs
Static electricity test		VS=±2KV~±6KV(contact),±2KV~±8KV (air), RS=330Ω CS=150pF 10 times
Vibration test	-	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes

- Prepare sets for testing

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

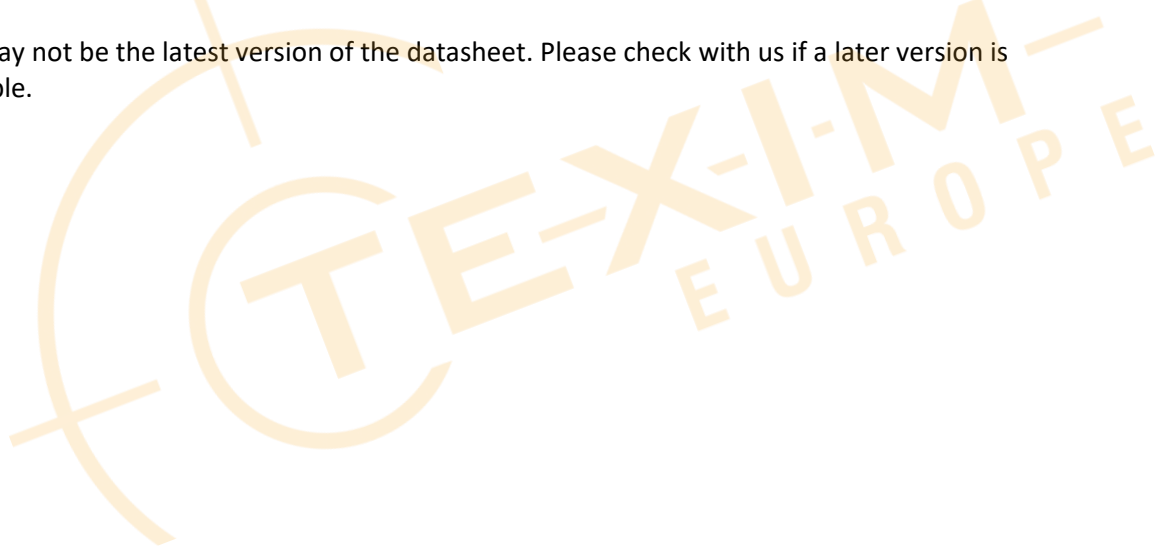



Headquarters & Warehouse

Elektrostraat 17
 NL-7483 PG Haaksbergen
 The Netherlands

T: +31 (0)53 573 33 33
 E: info@texim-europe.com
 Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
 NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
 E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
 B-1731 Zellik

T: +32 (0)2 462 01 00
 E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
 Carlton Le Moorland
 Lincoln LN5 9HS

T: +44 (0)1522 789 555
 E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
 D-25451 Quickborn

T: +49 (0)4106 627 07-0
 E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
 D-81829 München

T: +49 (0)89 436 086-0
 E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
 A-5020 Salzburg

T: +43 (0)662 216 026
 E: austria@texim-europe.com



Nordic

Stockholmsgade 45
 2100 Copenhagen

T: +45 88 20 26 30
 E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
 D-81829 München

T: +49 (0)89 436 086-0
 E: italy@texim-europe.com