Distributed by www.texim-europe.com

Distributed by:
TEXIM EUROPE
www.texim-europe.com

TFT DISPLAY SPECIFICATION



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

Winstar Display Co., LTD
華凌光電股份有限公司
WEB: https://www.winstar.com.tw E-mail: sales@winstar.com.tw

SPECIFICATION

CUSTOMER : _____

MODULE NO.: WF70A8TYFHLHGE#

APPROVED BY: **(FOR CUSTOMER USE ONLY)**	**PCB VERSION:** **DATA:** ☐ TFT Display Inspection Specification: https://www.winstar.com.tw/technology/download.html ☐ Precaution in use of TFT module: https://www.winstar.com.tw/technology/download/declaration.html

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY
			葉虹蘭
ISSUED DATE:	**2026/05/20**		

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

Winstar Display Co., LTD 華凌光電股份有限公司	MODLE NO：
RECORDS OF REVISION	**DOC. FIRST ISSUE**

VERSION	DATE	REVISED PAGE NO.	**SUMMARY**
0	2026/05/20		First issue

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

Contents

1.Module Classification Information

2.Summary

3.General Specifications

4.Absolute Maximum Ratings

5.Electrical Characteristics

6.Optical Characteristics

7.Interface

8.Reliability

9.Contour Drawing

10.Other

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

1.Module Classification Information

W	F	70	A8	T	Y	F	H	L	H	G	E	#
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬

①	Brand：WINSTAR DISPLAY CORPORATION		
②	Display Type：F→TFT Type, J→Custom TFT		
③	Display Size：7.0” TFT		
④	Model serials no.		
⑤	Backlight Type：	F→CCFL, White S→LED, High Light White	T→LED, White Z→Nichia LED, White
⑥	LCD Polarize Type/ Temperature range/ Gray Scale Inversion Direction	A→Transmissive, N.T, IPS TFT C→Transmissive, N. T, 6:00 ; F→Transmissive, N.T,12:00 ; I→Transmissive, W. T, 6:00 K→Transflective, W.T,12:00 L→Transmissive, W.T,12:00 N→Transmissive, Super W.T, 6:00	Q→Transmissive, Super W.T, 12:00 R→Transmissive, Super W.T, O-TFT V→Transmissive, Super W.T, VA TFT W→Transmissive, Super W.T, IPS TFT X→Transmissive, W.T, VA TFT Y→Transmissive, W.T, IPS TFT Z→Transmissive, W.T, O-TFT
⑦	A：TFT LCD B：TFT+SCREW HOLES+CONTROL BOARD C：TFT+ SCREW HOLES +A/D BOARD D：TFT+ SCREW HOLES +A/D BOARD+CONTROL BOARD E：TFT+ SCREW HOLES +POWER BOARD		F：TFT+CONTROL BOARD G：TFT+ SCREW HOLES H：TFT+D/V BOARD I：TFT+ SCREW HOLES +D/V BOARD J：TFT+POWER BD

⑧ Resolution:

A	128160	B	320234	C	320240	D	480234	E	480272	F	640480
G	800480	H	1024600	I	320480	J	240320	K	800600	L	240400
M	1024768	N	128128	P	1280800	Q	480800	R	640320	S	480128
T	800320	U	8001280	V	176220	W	1280398	X	1024250	Y	1920720
Z	800200	2	1024324	3	7201280	4	19201200	5	1366768	6	1280320

⑨ D: Digital L：LVDS M:MIPI

⑩ Interface:

N	Without control board	A	8Bit	B	16Bit	H	HDMI
I	I2C Interface	R	RS232	S	SPI Interface	U	USB

⑪ TS:

N	Without TS	T	Resistive touch panel	C	Capacitive touch panel (G-F-F)
G	Capacitive touch panel (G-G)	F	Capacitive touch panel (G-F)		
C2	Capacitive touch panel (G-F-F)+OCR	G1	Capacitive touch panel (G-G)+OCA		
G2	Capacitive touch panel (G-G)+OCR	B	CTP+GG+USB		

⑫ Version: X:Raspberry pi ; V: Raspberry pi 3B+

⑬	Special Code	#:Fit in with ROHS directive regulations

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

2.Summary

TFT 7.0”is a IPS transmissive type color active matrix TFT liquid crystal display that use amorphous silicon TFT as switching devices. This module is a composed of a TFT LCD module, It is usually designed for industrial application and this module follows RoHs.

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

3.General Specifications

Item	Dimension	Unit
Size	7.0	inch
Dot Matrix	1024 x RGBx600(TFT)	dots
Module dimension	169.9(W) x 103.4(H) x 23.9 (D)	mm
Active area	154.2144 x 85.92	mm
Pixel pitch	0.1506 x 0.1432	mm
LCD type	TFT, Normally Black, Transmissive	
Viewing Angle	85/85/85/85	
Aspect Ratio	16:9	
Controller IC	LT6911C or equivalent	
Backlight Type	LED, Normally White	
TFT Interface	DVI	
CTP IC	ILI2130 or Equivalent	
CTP Interface	USB	
CTP FW Version	0x07.0x00.0x00.0x00.0x65.0x90.0x00.0x01	
CTP Resolution	16384*16384	
With /Without TP	With CTP	
Surface	Glare	

*Color tone slight changed by temperature and driving voltage.

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

4.Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	℃
Storage Temperature	TST	-30	—	+80	℃

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp. ≦ 60℃, 90% RH MAX. Temp.＞60℃, Absolute humidity shall be less than 90% RH at 60℃

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

5.Electrical Characteristics

5.1. Operating conditions:

Item	Symbol	Min	Typ	Max	Unit	Remark
Supply Voltage For LCM	VDD	4.9	5	5.1	V	-
Supply Current For LCM	IDD	—	1470	2205	mA	Note 1
LED life time	—	50,000	—	—	Hr	Note 4

Backlight conditions:

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
PWM Control Level (Backlight PWM)	High Level	-	3.3	-	V	
	Low Level	-	0	-	V	
PWM Control Frequency	-	-	1K	-	Hz	

Note 1 : This value is test for VDD =5.0V , Ta=25℃ only

Note 2 : Please make sure to support enough current.

Note3 : Touch panel driver is base on the mouse driver program and through USB port connect to PC or embedded board.Can only support the single touch.

Note 4: The “LED life time” is defined as the module brightness decrease to 50% original brightness at Ta=25℃ and IL =240mA. The LED lifetime could be decreased if operating IL is lager than 240mA.

Note5: The PWM control circuit is able to adjust the duty ratio linearly from 0 to 95%.

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

6.Optical Characteristics

Item		Symbol	Condition.	Min	Typ.	Max.	Unit	Remark
Response time		Tr	θ=0°、Φ=0°	-	13	20	.ms	Note 3
		Tf		-	15	25		
Contrast ratio		CR	At optimized viewing angle	600	800	-	-	Note 4
Color Chromaticity	White	Wx	θ=0°、Φ=0	0.269	0.319	0.369	-	Note 2,5,6
		Wy		0.291	0.341	0.391	-	
Viewing angle	Hor.	ΘR	CR≧10	80	85	-	Deg.	Note 1
		ΘL		80	85	-		
	Ver.	ΦT		80	85	-		
		ΦB		80	85	-		
Brightness		-	-	400	450	-	cd/m2	Center of display
Uniformity		(U)	-	75	-	-	%	Note 5

Ta=25±2℃,

Note 1: Definition of viewing angle range


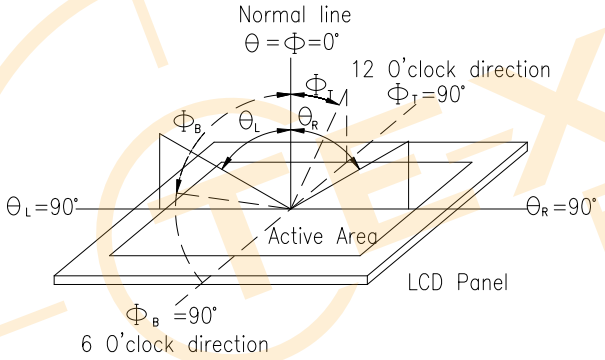


Fig. 6.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7orBM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.

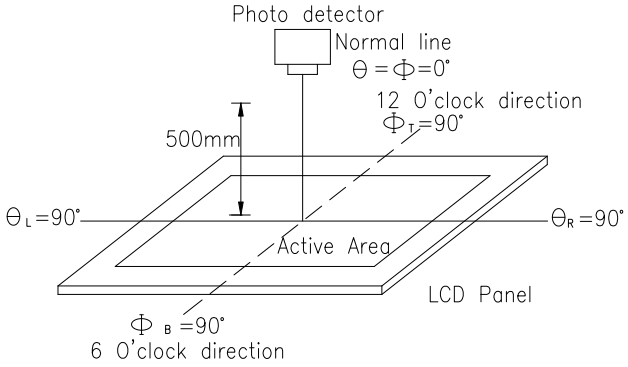


Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

Fig. 6.2. Optical measurement system setup

Note 3: Definition of Response time:
The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time, Tr, is the time between photo detector output intensity changed from 90%to 10%. And fall time, Tf, is the time between photo detector output intensity changed from 10%to 90%

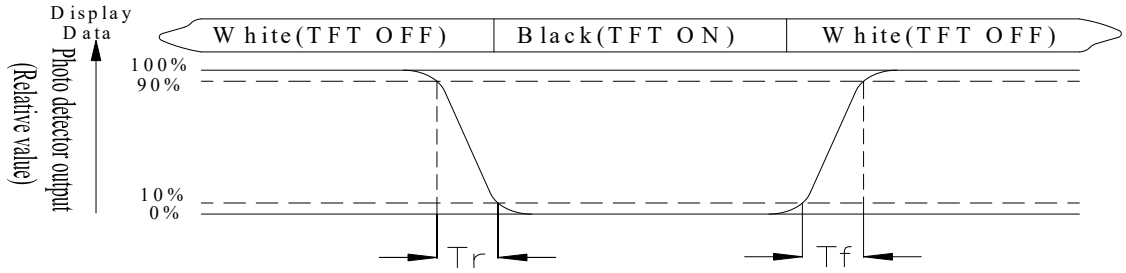

Note 4: Definition of contrast ratio:
The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: Definition of Luminance Uniformity
Active area is divided into 9 measuring areas (reference the picture in below). Every measuring point is placed at the center of each measuring area.
Luminance Uniformity (U) = Lmin/Lmax x100%
L = Active area length
W = Active area width

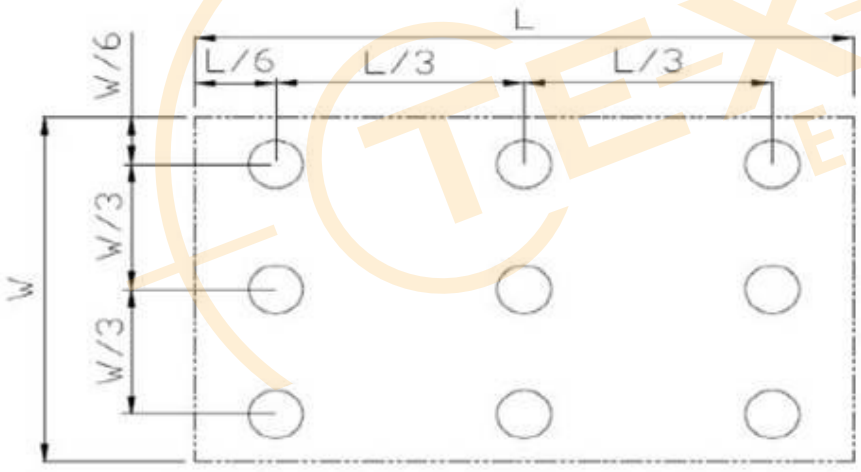


Fig 6.3. Definition of uniformity

Note 6: Definition of color chromaticity (CIE 1931)
Color coordinates measured at the center point of LCD

Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

7.Interface

7.1. USB

Pin No	Symbol	Function	Remark
A1	GND	Power Ground	
A4	NC	No connection	
A5	NC	No connection	
A6	D+	Data line +	
A7	D-	Data line -	
A8	NC	No connection	
A9	NC	No connection	
A12	GND	Power Ground	
B12	GND	Power Ground	
B9	NC	No connection	
B8	NC	No connection	
B7	D-	Data line -	
B6	D+	Data line +	
B5	NC	No connection	
B4	NC	No connection	
B1	GND	Power Ground	

7.2. POWER JACK

Pin No.	Symbol	Function	Remark
1	5V	Power Supply (5V)	
2	GND	Ground	
3	NC	No connection	

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

7.3. B/L dimming

Pin No.	Symbol	Function	Remark
1	PWM	Light Dimming Control (PWM) Input Voltage (bright in 0% & dark in 100%)	
2	GND	Ground	

7.4. DVI

Pin No.	Symbol	I/O	Function	Remark
1	Rx2+	I	Channel-2 positive receiver input; low-voltage signal differential- input pair.	
2	GND	P	Ground	
3	Rx2-	I	Channel-2 negative receiver input; low-voltage signal differential- input pair.	
4	Rx1+	I	Channel-1 positive receiver input; low-voltage signal differential- input pair.	
5	GND	P	Ground	
6	Rx1-	I	Channel-1 negative receiver input; low-voltage signal differential- input pair.	
7	Rx0+	I	Channel-0 positive receiver input; low-voltage signal differential- input pair.	
8	GND	P	Ground	
9	Rx0-	I	Channel-0 negative receiver input; low-voltage signal differential- input pair.	
10	RxC+	I	Clock positive receiver input; low-voltage signal differential- input pair.	
11	GND	P	Ground	
12	RxC-	I	Clock negative receiver input; low-voltage signal differential- input pair.	
13-14	NC	-	No connection	
15	SCL	I/O	DDC(Data Display Channel) Clock	
16	SDA	I/O	DDC(Data Display Channel) Data	
17	GND	P	Ground	
18	5V	P	Power Supply	
19	Detect	I/O	Hot plug detect	


I: input, O: output, P: Power

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

8.Reliability

Content of Reliability Test (Wide temperature, -20℃~70℃)


Environmental Test			
Test Item	**Content of Test**	**Test Condition**	**Note**
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80℃ 200hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30℃ 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70℃ 200hrs	2
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20℃ 200hrs	1,2
High Temperature/ Humidity Operation	The module should be allowed to stand at 60℃,90%RH max	60℃,90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation -20℃ 25℃ 70℃  30min 5min 30min 1 cycle	-20℃/70℃ 10 cycles	2
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=±6KV(contact), ±8KV(air), RS=330Ω CS=150pF 10 times	4

Note1: No dew condensation to be observed.
Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.
Note3: The packing have to including into the vibration testing.
Note4: Endurance test applying the electric stress to the finished product housing

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

9.Contour Drawing

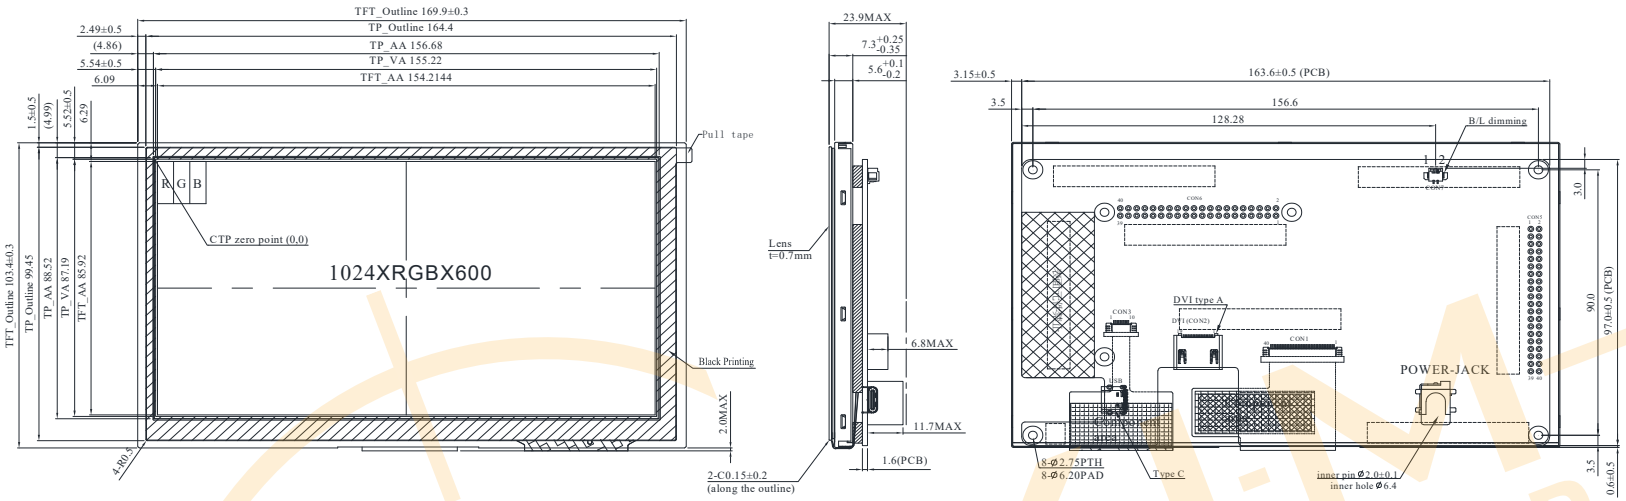

POWER JACK

PIN NO.	SYMBOL
1	5V
2	GND
3	NC

2 — 1
(GND) (5V)

B/L dimming

PIN NO.	SYMBOL
1	PWM
2	GND

DVI

PIN NO.	SYMBOL
1	RX2+
2	GND
3	RX2-
4	RX1+
5	GND
6	RX1-
7	RX0+
8	GND
9	RX0-
10	RXC+
11	GND
12	RXC-
13	NC
14	NC
15	SCL
16	SDA
17	GND
18	5V
19	Detect

USB

Pin	Symbol	Pin	Symbol
A1	GND	B12	GND
A4	NC	B9	NC
A5	NC	B8	NC
A6	D+	B7	D-
A7	D-	B6	D+
A8	NC	B5	NC
A9	NC	B4	NC
A12	GND	B1	GND

The non-specified tolerance of dimension is ±0.3mm.

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

winstar

LCM Sample Estimate Feedback Sheet

Module Number： _____

1、Panel Specification：

1.	Panel Type：	□ Pass	□ NG , _____
2.	View Direction：	□ Pass	□ NG , _____
3.	Numbers of Dots：	□ Pass	□ NG , _____
4.	View Area：	□ Pass	□ NG , _____
5.	Active Area：	□ Pass	□ NG , _____
6.	Operating Temperature：	□ Pass	□ NG , _____
7.	Storage Temperature：	□ Pass	□ NG , _____
8.	Others： _____		

2、Mechanical

1.	PCB Size：	□ Pass	□ NG , _____
2.	Frame Size：	□ Pass	□ NG , _____
3.	Material of Frame：	□ Pass	□ NG , _____
4.	Connector Position：	□ Pass	□ NG , _____
5.	Fix Hole Position：	□ Pass	□ NG , _____
6.	Backlight Position：	□ Pass	□ NG , _____
7.	Thickness of PCB：	□ Pass	□ NG , _____
8.	Height of Frame to PCB：	□ Pass	□ NG , _____
9.	Height of Module：	□ Pass	□ NG , _____
10.	Others：	□ Pass	□ NG , _____

3、Relative Hole Size：

1.	Pitch of Connector：	□ Pass	□ NG , _____
2.	Hole size of Connector：	□ Pass	□ NG , _____
3.	Mounting Hole size：	□ Pass	□ NG , _____
4.	Mounting Hole Type：	□ Pass	□ NG , _____
5.	Others：	□ Pass	□ NG , _____

4、Backlight Specification：

1.	B/L Type：	□ Pass	□ NG , _____
2.	B/L Color：	□ Pass	□ NG , _____
3.	B/L Driving Voltage (Reference for LED Type)：	□ Pass	□ NG , _____
4.	B/L Driving Current：	□ Pass	□ NG , _____
5.	Brightness of B/L：	□ Pass	□ NG , _____
6.	B/L Solder Method：	□ Pass	□ NG , _____
7.	Others：	□ Pass	□ NG , _____

>> **Go to page 2** <<

Distributed by www.texim-europe.com

Distributed by www.texim-europe.com

5、**Electronic Characteristics of Module**：

1. Input Voltage： □ Pass □ NG ,_____
2. Supply Current： □ Pass □ NG ,_____
3. Driving Voltage for LCD： □ Pass □ NG ,_____
4. Contrast for LCD： □ Pass □ NG ,_____
5. B/L Driving Method： □ Pass □ NG ,_____
6. Negative Voltage Output： □ Pass □ NG ,_____
7. Interface Function： □ Pass □ NG ,_____
8. LCD Uniformity： □ Pass □ NG ,_____
9. ESD test： □ Pass □ NG ,_____
10. Others： □ Pass □ NG ,_____

6、**Summary**：

Sales signature：_____

Customer Signature：_____ **Date**：____/____/____

Distributed by www.texim-europe.com

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Texim”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer’s responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer’s technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

Distributed by www.texim-europe.com

Texim Europe - contact details



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com