Distributed by www.texim-europe.com

310 Genius Drive
Winter Park, FL 32789
Phone: 407-629-0500
Fax: 407-645-5376
sales@osddisplays.om
www.osddisplays.com

Distributed by:
TEXIM EUROPE
www.texim-europe.com

Customer:
Model Name: OSD102TN43
SPEC NO.: A102-43-TT-02
Date: 2007/05/04
Version: 02

For Customer's Acceptance

Approved by	Comment

Approved by	Reviewed by	Prepared by

Distributed by www.texim-europe.com

Record of Revision

Version	Revise Date	Page	Content
Pre-Spec. 01	2006/12/04		Initial release.
Pre-Spec. 02	2007/01/18	1,18	Add LCM weight
		2	Modify recommended model of LVDS connector
		3	Modify operation frequency in Note 2
		7	Add Note in power sequence
		9	Delete SYNC Mode & DE Mode timing conditions
		11	Modify value of θ_T
		17	Modify connector CN1
		19	Add packaging drawing
Finall-Spec.01	2007/04/05	1	Modify Backlight power consumption
			Modify Panel power consumption
		4	Modify Power Voltage V_{CC} Values
		5	Modify Current Consumption Values
		10	Add Test Conditions 1
		11	Modify the test instrument of viewing angle from TOPCON BM-7 to ELDIM
		17	Modify Carton Weight
Finall-Spec.02	2007/05/04	2	Add note 1 for pin 20,21
		3	Add definition of pin 30
			Modify the definition of pin 4 & pin 5
		1	Modify the Backlight power consumption

Distributed by www.texim-europe.com

Contents

1. General Specifications 1
2. Pin Assignment 2
3. Operation Specifications 5
   3.1. Absolute Maximum Ratings 5
   3.2. Typical Operation Conditions 6
   3.3. Power Sequence 7
   3.4. Timing Characteristics 8
      3.4.1 Timing Conditions 8
      3.4.2Timing Diagram 9
4. Optical Specifications 11
5. Reliability Test Items 15
6. General Precautions 16
   6.1. Safety 16
   6.2. Handling 16
   6.3. Static Electricity 16
   6.4. Storage 16
   6.5. Cleaning 16
7. Mechanical Drawing 17
8. Package Drawing 18
   8.1 Packaging Material Table 18
   8.2 Packaging Quantity 18
   8.3 Packaging Drawing 19

Distributed by www.texim-europe.com

1. General Specifications

No.	Item	Specification	Remark
1	LCD size	10.2 inch(Diagonal)	
2	Driver element	a-Si TFT active matrix	
3	Resolution	1024X3(RGB)X600	
4	Display mode	Normally white, Transmissive	
5	Dot pitch	0.0722(W)X0.2192(H) mm	
6	Active area	221.7984 (W)X131.52 (H) mm	
7	Module size	235.0(W)X145.8(H)X5.9(D) mm	Note 1
8	Surface treatment	Anti-Glare	
9	Color arrangement	RGB-stripe	
10	Interface	Digital (LVDS)	
11	Backlight power consumption	3.500W(Typ.)	
12	Panel power consumption	0.990W(Typ.)	
13	Weight	258g(Typ.)	

Note 1: Refer to Mechanical Drawing.

Distributed by www.texim-europe.com

2. Pin Assignment

TFT LCD Panel Driving Section


LVDS Connector is used for the module electronics interface. The recommended model is MDF76KBW-30S-1H(58) manufactured by Hirose.

Pin No.	Symbol	I/O	Function	Remark
1	V_{CC}	P	Power Voltage for digital circuit	
2	V_{CC}	P	Power Voltage for digital circuit	
3	V_{CC}	P	Power Voltage for digital circuit	
4	U/D	I	Select up or down scanning direction	Note5,6
5	L/R	I	Select left to right scanning direction	Note5,6
6	VSS	P	Ground	
7	VSS	P	Ground	
8	Rin0-	I	- LVDS differential data input (R0-R5,G0)	
9	Rin0+	I	+ LVDS differential data input (R0-R5,G0)	
10	VSS	P	Ground	
11	Rin1-	I	- LVDS differential data input (G1-G5,B0-B1)	
12	Rin1+	I	+ LVDS differential data input (G1-G5,B0-B1)	
13	VSS	P	Ground	
14	Rin2-	I	- LVDS differential data input (B2-B5,HS,VS,DE)	
15	Rin2+	I	+ LVDS differential data input (B2-B5,HS,VS,DE)	
16	VSS	P	Ground	
17	ClkIN-	I	-LVDS differential clock input	
18	ClkIN+	I	+LVDS differential clock input	
19	VSS	P	Ground	
20	Rin3-	I	- LVDS differential data input (R6-R7,G6-G7,B6-B7)	Note1


Distributed by www.texim-europe.com

21	Rin3+	I	+ LVDS differential data input (R6-R7,G6-G7,B6-B7)	Note1
22	VSS	P	Ground	
23	V_{LED}	P	Power Voltage for LED circuit	
24	V_{LED}	P	Power Voltage for LED circuit	
25	G_{LED}	P	Ground for LED circuit	
26	G_{LED}	P	Ground for LED circuit	
27	NC	—	No Connection	
28	NC	—	No Connection	
29	ADJ	P	Adjust the Back Light brightness	Note3,4
30	DTH	P	Dithering function	Note2

Note1:If Input data is 6 bit,Rin3-&Rin3+ can't be connected.
Note2:If Input data is 6 bit,DTH can`t be connected; If Input data is 8 bit, DTH must be connected to Ground.
Note3:ADJ adjust brightness to control Pin,Pulse duty the bigger brighter.

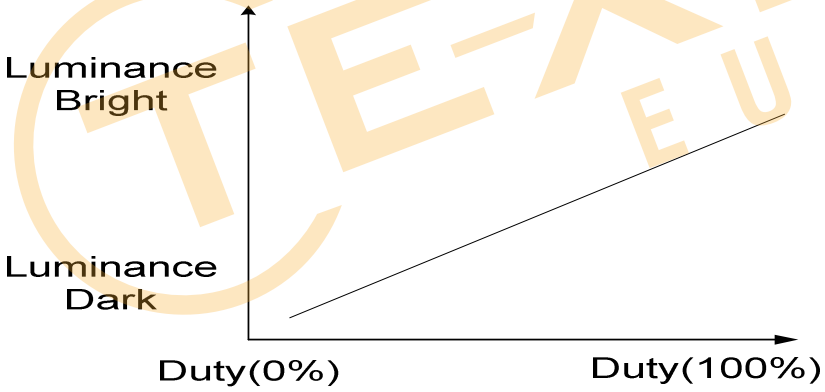

Note 4:ADJ signal=0~3.3V,operation frequency:100~300Hz

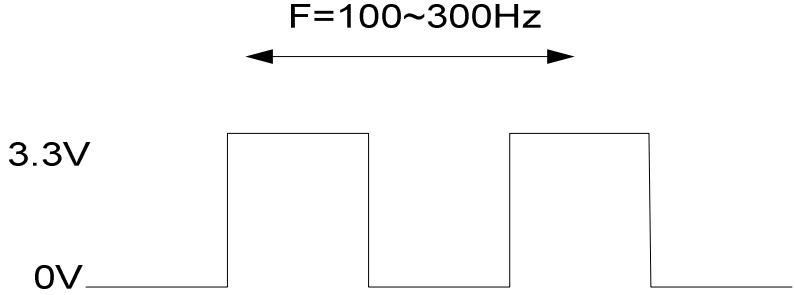


Distributed by www.texim-europe.com

Note 5：Selection of scanning mode

Setting of scan control input		Scanning direction
U/D	R/L	
GND	V_{CC}	Up to down, left to right
V_{CC}	GND	Down to up, right to left
GND	GND	Up to down, right to left
V_{CC}	V_{CC}	Down to up, left to right

Note 6: Definition of scanning direction.
Refer to the figure as below:

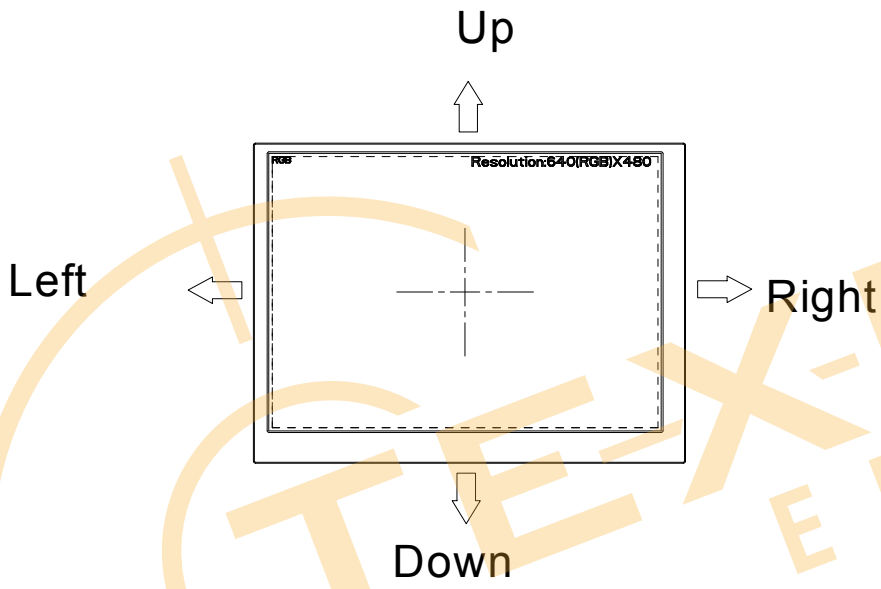

Distributed by www.texim-europe.com

3. Operation Specifications

3.1.Absolute Maximum Ratings

Item	Symbol	Values		Unit	Remark
		Min.	Max.		
Power Voltage	V_{CC}	-0.3	3.6	V	
	V_{LED}	-	5.5	V	
Input Signal Voltage	V_I	-0.3	6.3	V	Note 1
Operation Temperature	T_{OP}	-20	70	℃	
Storage Temperature	T_{ST}	-30	80	℃	

Note 1: The product is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above.

Distributed by www.texim-europe.com


3.2. Typical Operation Conditions

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Power Voltage	V_{CC}	3.1	3.3	3.5	V	
	V_{LED}	4.8	5.0	5.2	V	
Current Consumption	I_{CC}	-	300	350	mA	V_{CC}=3.3V
	I_{LED}	-	700	850	mA	V_{LED}=5.0V
Differential Input High Threshold	V_{THLVDS}	-	-	100.0	mV	V_{cm}=1.2V
Differential Input Low Threshold	V_{TLLVDS}	-100.0	-	-	mV	
LVDS Receiver Input Current	I_{IN}	-	-	±10.0	μA	V_{IN}=2.4V or 0V V_{CC} =3.6V
LVDS Receiver Input Common Voltage	V_{CM}	0.2	-	1.9	V	V_{CC} =3.3V T_a=+25 ℃
LED life time	-	20,000	-	-	Hr	Note 1

Note 1: The “LED life time” is defined as the module brightness decrease to 50% original brightness at Ta=25℃ and V_{LED} =5.0V. The LED lifetime could be decreased if operating V_{LED} is larger than 5.0V.

Distributed by www.texim-europe.com

3.3. Power Sequence

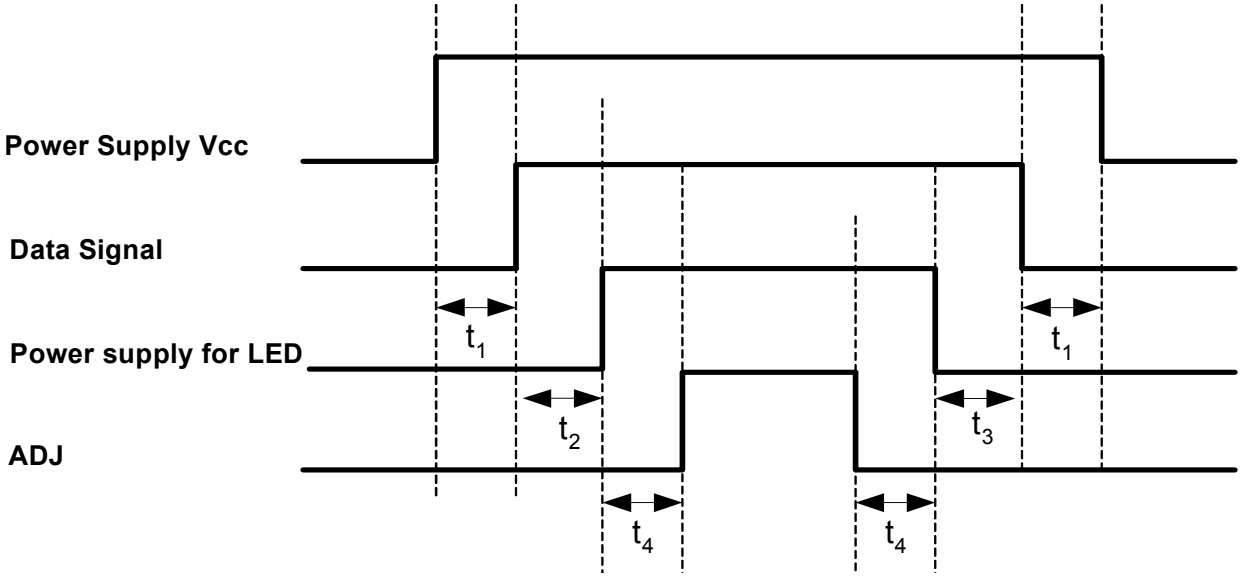

t_1 > 50 mSec
t_2 ≧ 200 mSec
t_3 ≧ 200 mSec
t_4 ≧ 50mSec

Note: Data Signal includes Rin0- ~ Rin3-,Rin0+ ~ Rin3+,CLKIN- , CLKIN+.

Distributed by www.texim-europe.com

3.4.Timing Characteristics

3.4.1 Timing Conditions

Switching Characteristics

(recommended operating condition unless otherwise noted)


Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
RxCLKIN Period	t_{RCP}	11.76	T	50	ns	Note 1
RxCLKIN High Time	t_{RCH}	-	T/2	-	ns	
RxCLKIN Low Time	t_{RCL}	-	T/2	-	ns	
PAD0/1 to RxCLKIN Delay	t_{RCD}	-	3T/7	-	ns	
Data Setup to RxCLKIN	t_{RS}	1.9	-	-	ns	
Data Hold from RxCLKIN	t_{RH}	3.0	-	-	ns	
Input Data Position 0(T=11.76ns)	T_{RIP1}	-0.4	0	0.4	ns	Note 2
Input Data Position 1(T=11.76ns)	T_{RIP0}	T/7-0.4	T/7	T/7+0.4	ns	Note 2
Input Data Position 2(T=11.76ns)	T_{RIP6}	2T/7-0.4	2T/7	2T/7+0.4	ns	Note 2
Input Data Position 3(T=11.76ns)	T_{RIP5}	3T/7-0.4	3T/7	3T/7+0.4	ns	Note 2
Input Data Position 4(T=11.76ns)	T_{RIP4}	4T/7-0.4	4T/7	4T/7+0.4	ns	Note 2
Input Data Position 5(T=11.76ns)	T_{RIP3}	5T/7-0.4	5T/7	5T/7+0.4	ns	Note 2
Input Data Position 6(T=11.76ns)	T_{RIP2}	6T/7-0.4	6T/7	6T/7+0.4	ns	Note 2

Note 1: T= RxCLKIN Period

Note 2 : V_{CC} =3.3V , Ta=25℃


Distributed by www.texim-europe.com

3.4.2 Timing Diagram

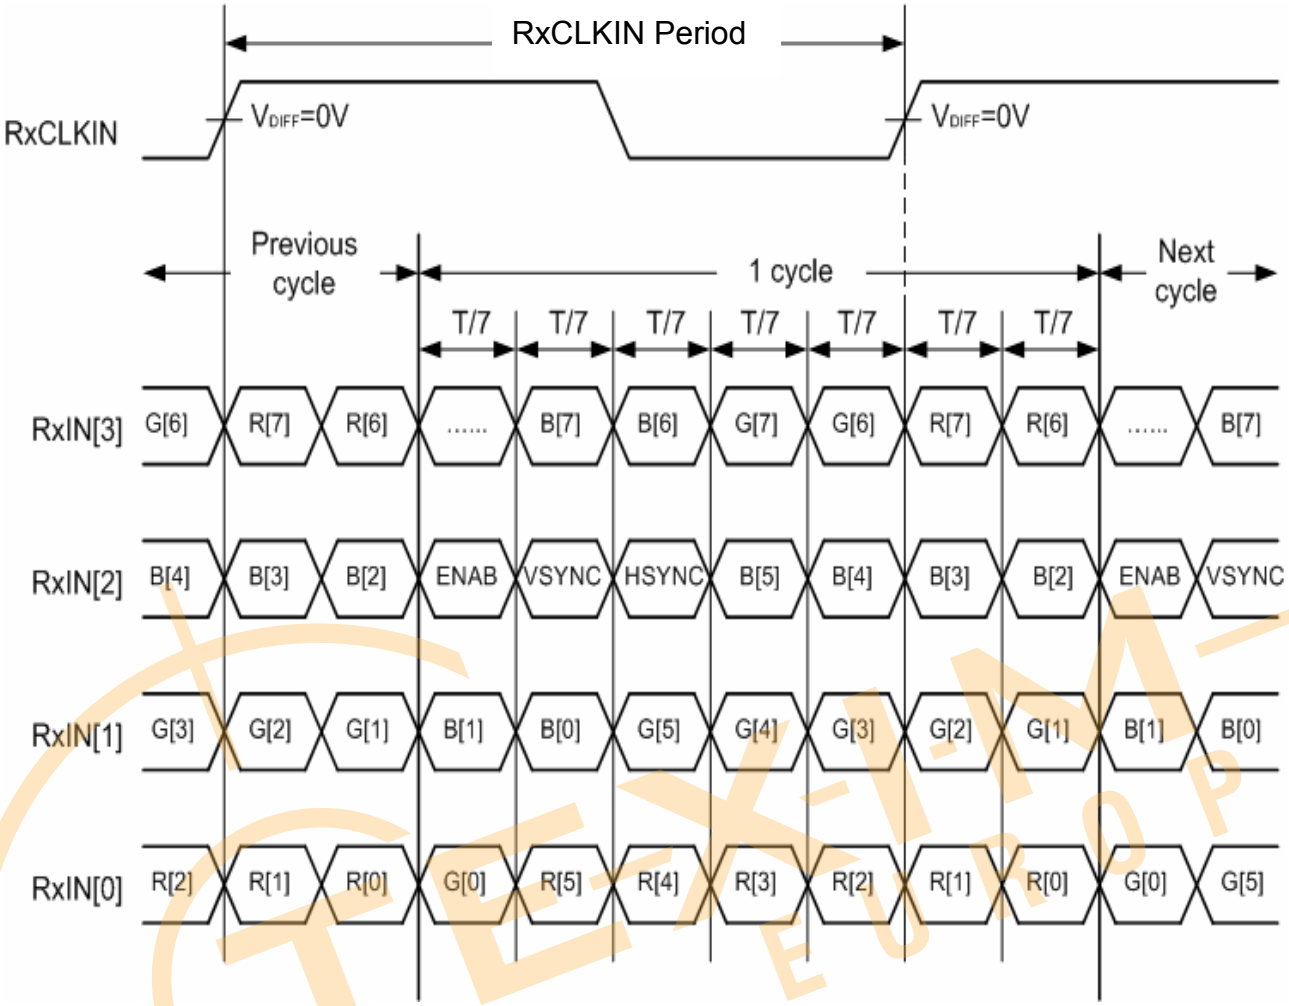

Note : R/G/B[7]s are MSBs and R/G/B[0]s are LSBs

Distributed by www.texim-europe.com

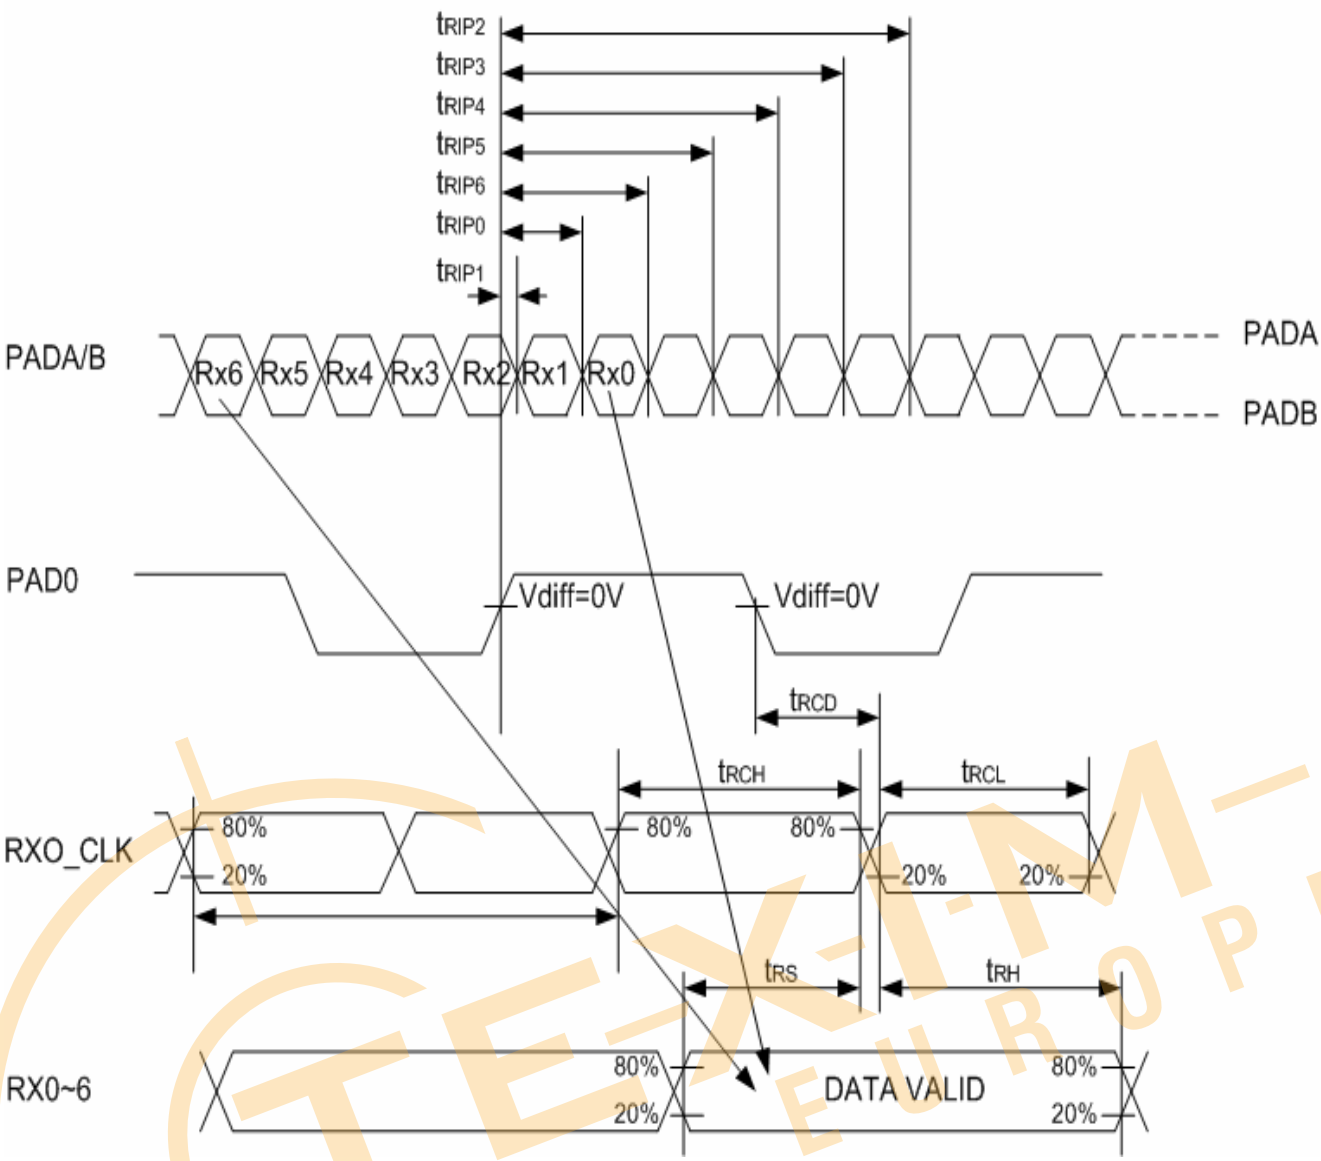

LVDS AC Timing Diagrams

Distributed by www.texim-europe.com

4. Optical Specifications

Item	Symbol	Condition	Values			Unit	Remark
			Min.	Typ.	Max.		
Viewing angle (CR≥ 10)	θ_L	Φ=180°(9 o'clock)	70	80	-	degree	Note 1
	θ_R	Φ=0°(3 o'clock)	70	80	-		
	θ_T	Φ=90°(12 o'clock)	60	70	-		
	θ_B	Φ=270°(6 o'clock)	70	80	-		
Response time	T_{ON}	Normal θ=Φ=0°	-	10	20	msec	Note 3
	T_{OFF}		-	15	30	msec	Note 3
Contrast ratio	CR		400	500	-	-	Note 4
Color chromaticity	W_X		0.26	0.31	0.36	-	Note 2 Note 5 Note 6
	W_Y		0.28	0.33	0.38	-	
Luminance	L		250	300	-	-	Note 6
Luminance uniformity	Y_U		70	75	-	%	Note 7

Test Conditions:

1. Viewing angle is tested when V_{black} =4.9V; V_{white} =0.6V
2. V_{CC}=3.3V, V_{LED}=5.0V, the ambient temperature is 25℃.
3. The test systems refer to Note 2.

Distributed by www.texim-europe.com

Note 1: Definition of viewing angle range

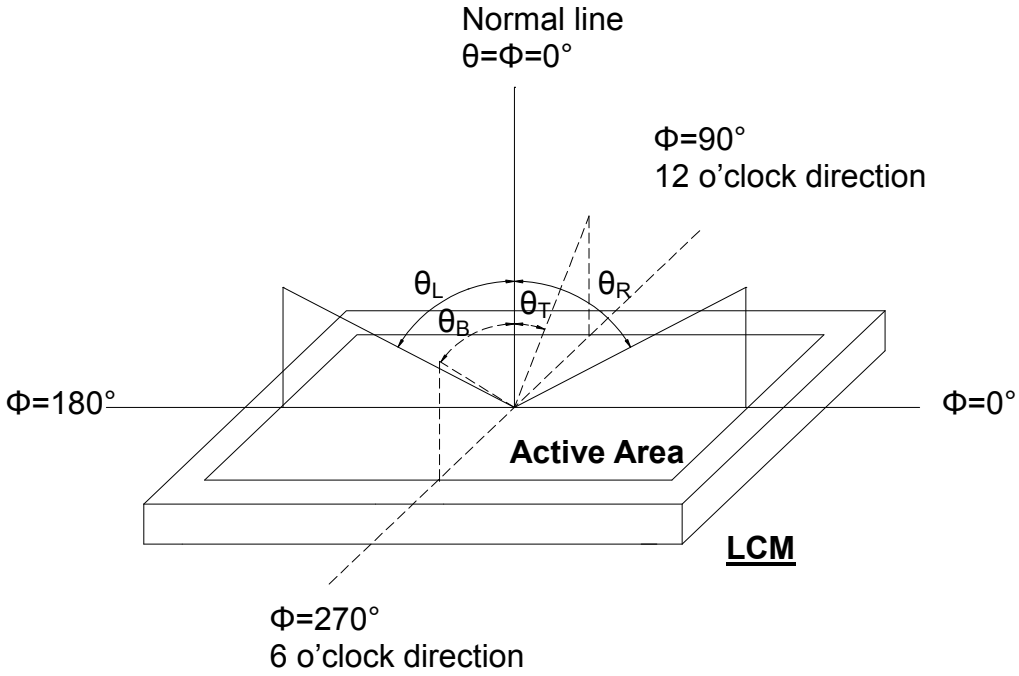


Fig. 4-1 Definition of viewing angle

Note 2: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Viewing angle is measured by ELDIM-EZ contrast/Height :1.2mm ,Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/ Field of view: 1° /Height: 500mm.)

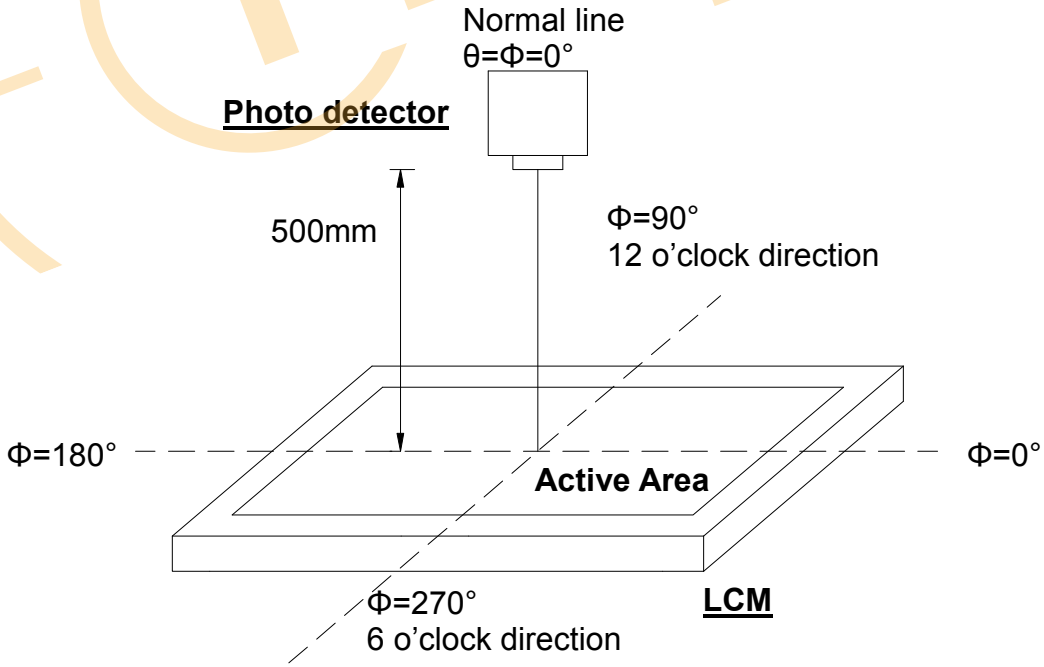


Fig. 4-2 Optical measurement system setup

Distributed by www.texim-europe.com

Note 3: Definition of Response time

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time (T_{ON}) is the time between photo detector output intensity changed from 90% to 10%. And fall time (T_{OFF}) is the time between photo detector output intensity changed from 10% to 90%.

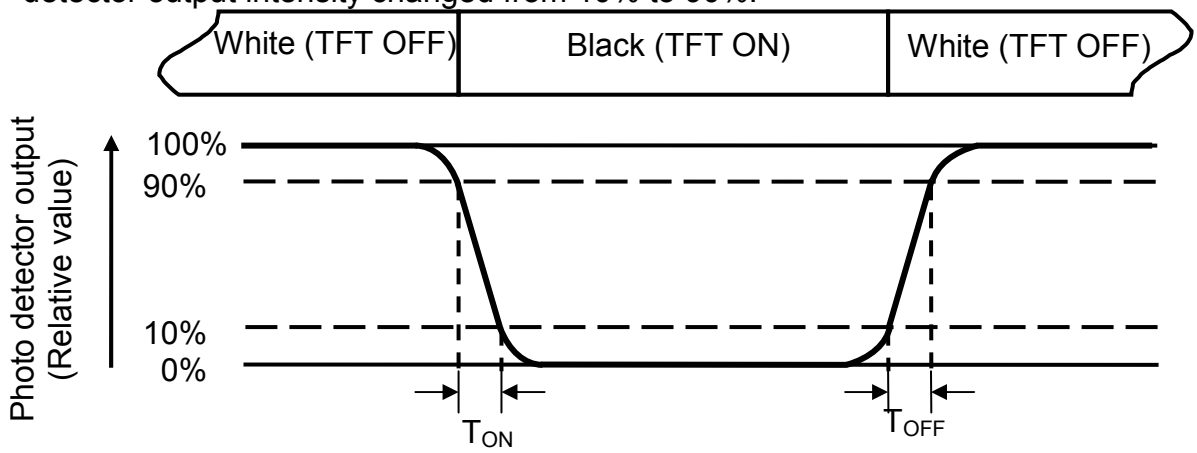


Fig. 4-3 Definition of response time

Note 4: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: All input terminals LCD panel must be ground while measuring the center area of the panel. The LED driving condition is V_{LED}=5.0V.

Distributed by www.texim-europe.com

Note 7: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer to Fig. 4-4).Every measuring point is placed at the center of each measuring area.

$$Luminance\ \ Uniformity\ (Yu) = \frac{B_{min}}{B_{max}}$$

L-------Active area length W----- Active area width

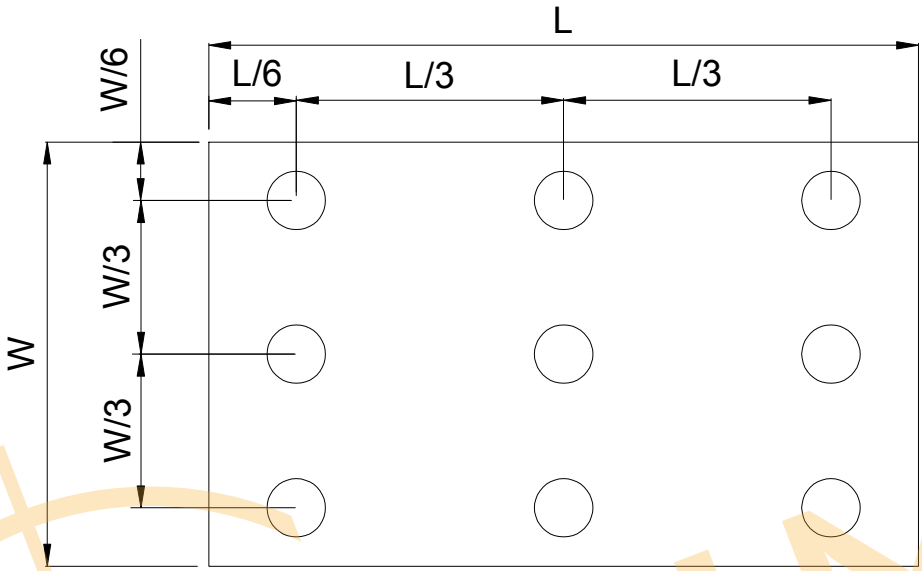


Fig. 4-4 Definition of measuring points

$\mathbf{B_{max}}$: The measured maximum luminance of all measurement position.
$\mathbf{B_{min}}$: The measured minimum luminance of all measurement position.

Distributed by www.texim-europe.com

5. Reliability Test Items

(Note3)

Item	Test Conditions	Remark
High Temperature Storage	Ta = 80℃ 240 hrs	Note 1,Note 4
Low Temperature Storage	Ta =-30℃ 240hrs	Note 1,Note 4
High Temperature Operation	Ts = 70℃ 240hrs	Note 2,Note 4
Low Temperature Operation	Ta =-20℃ 240hrs	Note 1,Note 4
Operate at High Temperature and Humidity	+40℃, 90%RH max. 240 hrs	Note 4
Thermal Shock	(-30)℃/30 min ~ (+80)℃/30 min for a total 100 cycles, Start with cold temperature and end with high temperature.	Note 4
Vibration Test	Frequency range:10~55Hz Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2 hours for each direction of X. Y. Z. (6 hours for total)	
Mechanical Shock	100G 6ms,±X, ±Y, ±Z 3 times for each direction	
Package Vibration Test	Random Vibration : 0.015G*G/Hz from 5-200HZ, -6dB/Octave from 200-500HZ 2 hours for each direction of X. Y. Z. (6 hours for total)	
Package Drop Test	Height:60 cm 1 corner, 3 edges, 6 surfaces	
Electro Static Discharge	± 2KV, Human Body Mode, 100pF/1500Ω	

Note 1: Ta is the ambient temperature of samples.
Note 2: Ts is the temperature of panel's surface.
Note 3: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, all the measurement shall be executed after the product is left alone for two hours; and the product only guarantees operation, but dosen't guarantee all the cosmetic specification.
Note 4: Before cosmetic and function tests , the product must have enough recovery time, at least 2 hours at room temperature.

Distributed by www.texim-europe.com

6. General Precautions

6.1. Safety

Liquid crystal is poisonous. Do not put it in your mouth. If liquid crystal touches your skin or clothes, wash it off immediately by using soap and water.

6.2. Handling

1. The LCD panel is plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
2. The polarizer attached to the display is easily damaged. Please handle it carefully to avoid scratch or other damages.
3. To avoid contamination on the display surface, do not touch the module surface with bare hands.
4. Keep a space so that the LCD panels do not touch other components.
5. Put cover board such as acrylic board on the surface of LCD panel to protect panel from damages.
6. Transparent electrodes may be disconnected if you use the LCD panel under environmental conditions where the condensation of dew occurs.
7. Do not leave module in direct sunlight to avoid malfunction of the ICs.

6.3. Static Electricity

1. Be sure to ground module before turning on power or operating module.
2. Do not apply voltage which exceeds the absolute maximum rating value.

6.4. Storage


1. Store the module in a dark room where must keep at 25±10℃ and 65%RH or less.
2. Do not store the module in surroundings containing organic solvent or corrosive gas.
3. Store the module in an anti-electrostatic container or bag.

6.5. Cleaning

1. Do not wipe the polarizer with dry cloth. It might cause scratch.
2. Only use a soft sloth with IPA to wipe the polarizer, other chemicals might permanent damage to the polarizer.

Distributed by www.texim-europe.com

7. Mechanical Drawing

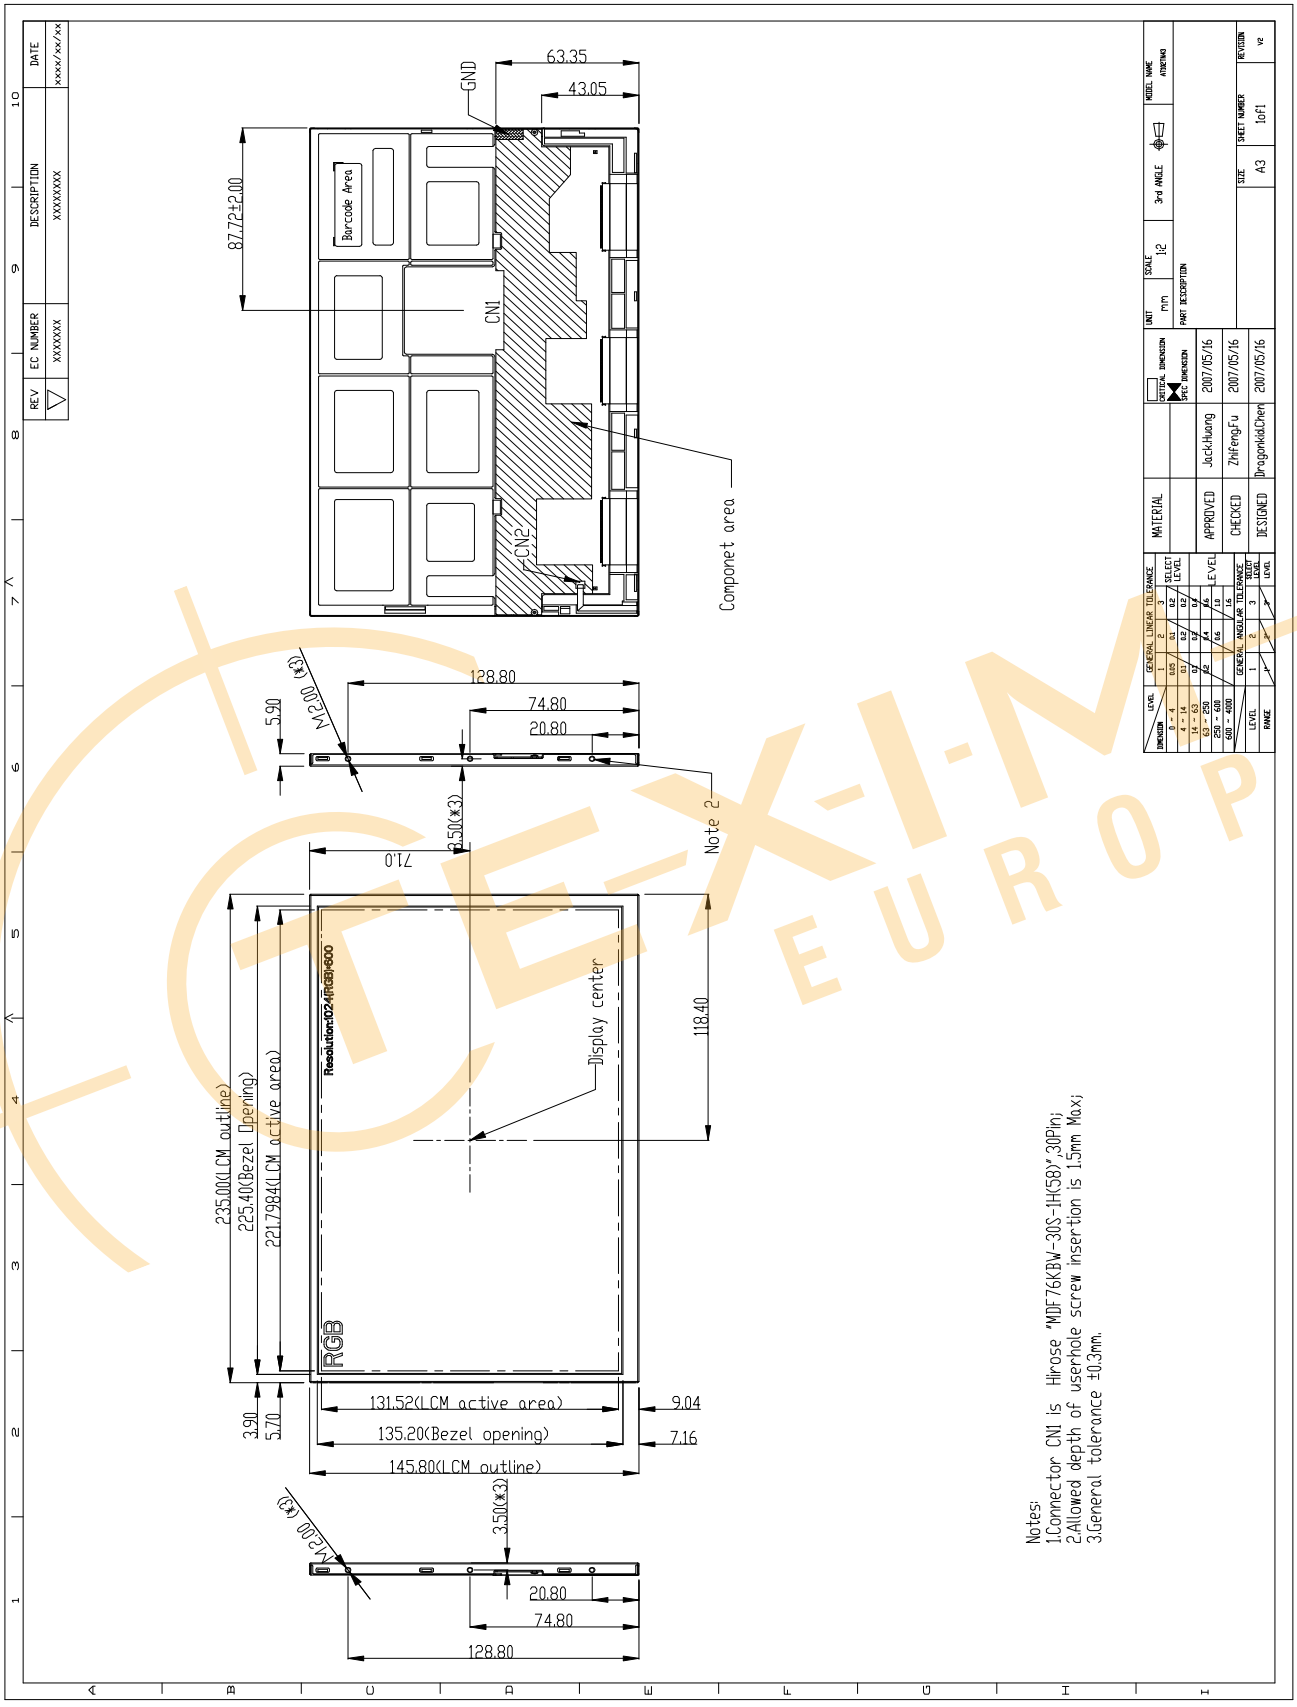

Distributed by www.texim-europe.com

8. Package Drawing

8.1 Packaging Material Table

No.	Item	Model (Material)	Dimensions(mm)	Unit Weight (kg)	Quantity	Remark
1	LCM Module	OSD102TN43	235.0X145.8X5.9	0.258	25pcs	
2	Partition	BC Corrugated paper	512X349X226	1.350	1	
3	Partition Paper	B Corrugated paper	510X350X7	0.148	2	
4	Corrugated Bar	B Corrugated paper	512X370X7	0.110	2	
5	Dust-Proof Bag	PE	900X700X0.05	0.010	1	
6	A/S Bag	PE	280X200X0.05	0.001	25	10^{9}～ 10^{11}Ω/sq
7	Carton	Corrugated paper	530X355X255	1.100	1	
8	Total weight	9.451kg ± 5%				

8.2 Packaging Quantity

Total LCM quantity in Carton: no. of Partition 1 Rows x quantity per Row 25 = 25

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Texim”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer’s responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer’s technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

Distributed by www.texim-europe.com

Texim Europe - contact details



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com